


ERASE

PRODUCT INFORMATION

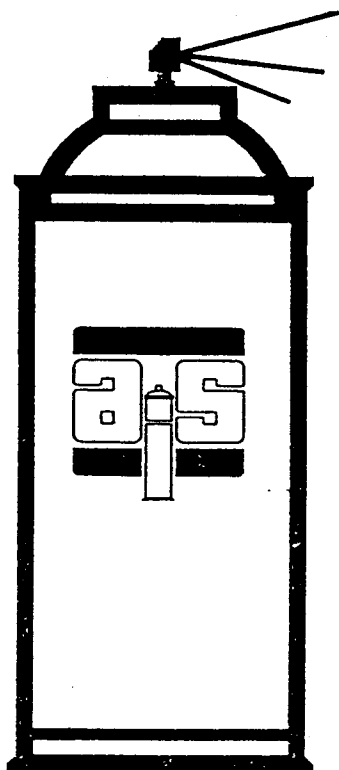

TM-1206B VANDALISM/PAINT, GASKET & DECAL REMOVER

DESCRIPTION

GASKET REMOVER IS A FAST ACTING GENERAL PURPOSE GASKET, PAINT, OIL, TAR AND DECAL STRIPPER.

APPLICATION AND USES

REMOVES PAINT, OIL BASE, LATEX, ENAMEL, LACQUER, SHELLAC, VARNISH AND MOST OTHER SYNTHETIC FINISHES.
REMOVES GASKETS FROM ANY TYPE OF METAL.
EXCELLENT FOR USE ON POROUS STONE & MASONRY SURFACES.
REMOVES DECALS AND SIMULATED WOOD PANELING.
STRIPS TAR AND ASPHALT, CARBON DEPOSITS AND REMOVES DRIED OILS.
NOT FOR USE ON PLASTIC, TILE, LINOLEUM OR SYNTHETIC FABRICS.

DIRECTIONS FOR USE

SHAKE CAN BEFORE USING.
SPRAY A HEAVY COAT 8 TO 10 INCHES FROM SURFACE (PROTECT PAINTED SURFACES FROM OVERSPRAY) AND ALLOW PRODUCT TO SET FOR 5-10 MINUTES.
REMOVE WITH A KNIFE OR HOSE CLEAN THE SECTION.
SECOND APPLICATION MAY BE NECESSARY TO REMOVE ANY RESIDUE .
IF LEFT IN CONTACT WITH ALUMINUM, A REACTION MAY TAKE PLACE CAUSING PITTING. FLUSH OFF WITH BRAKE CLEANER.

FEATURES

- USDA APPROVED.
- FAST-ACTING.
- NON-SAGGING.
- ECONOMICAL.

BENEFITS

- AUTHORIZED BY THE USDA FOR USE IN FEDERALLY INSPECTED MEAT AND POULTRY PLANTS.
- SAFE FOR USE ON ALL TYPES OF METALS, WOOD AND PLASTER (REMOVES GASKETS EVEN IN HIGH TEMPERATURE AREA: :).
- ADHERES TO VERTICAL SURFACES.
- SAVES LABOR TIME AND REDUCES EXPENSIVE SANDING COSTS.

SPECIFICATIONS

APPEARANCE:	CLEAR
ODOR:	SOLVENT
PROPELLANT:	PROPANE/ISOBUTANE
V.O.C.:	31%
NFPA 714 - FLAMMABILITY:	4
NFPA 30B - STORAGE:	1
CAN SIZE/LABEL WT.:	16 oz./15 oz.
	20 oz./19 oz.

aerosol product data sheet

