


16018

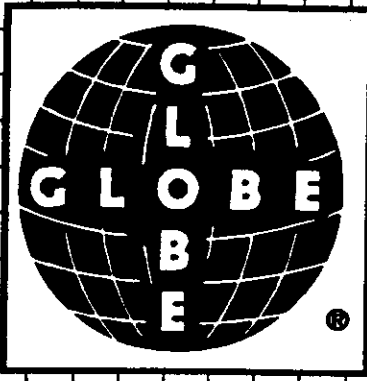

TECHNICAL DATA SHEET

SEAL-LOX POLYACRYLATE UNDERCOATER

Description This tough, durable product is unique because it serves two functions. It's a floor sealer and then it doubly serves to prevent scuffing and marring. It produces a lasting gloss on all floors. It bonds to tile floors, forming a unitized floor protection system. This product protects against stains and water penetration. Comes off like magic with non-ammoniated wax emulsifier or ammoniated wax strippers.

Directions Strip floors thoroughly and prepare neutral dry floor. To seal, apply two thin coats, allowing at least 30 minutes drying time between coats. Daily maintenance requires sweeping and damp mopping or spray-buffing. Heavy traffic lanes or worn areas should be recoated periodically.

Safety Keep Out Of Reach Of Children and refer to Material Safety Data Sheet for additional safety information. L-333-051093

Specifications	
Specific Gravity	1.020+0.005
pH	8.3+- .3
Solids	12%
Leveling	Excellent
Film Formation	Excellent
Gloss	Very Good
Water Resistance	Excellent
Detergent Resistance	Very Good - excellent
Removability	Excellent
Black Heel Mark Resistance	Good
Slip Resistance	0.6
(James Static Coefficient of Friction)	

**GLOBE CHEMICAL COMPANY
2833 WASHINGTON STREET
AVONDALE ESTATES, GEORGIA 30002**